

NPR48-ES Rectifier Module



Contents


Description	Page
AC Input	2
DC Output	3
Environmental Requirements	3
Mechanical	4
Compliances	4
Certifications	4

eps RECHENZENTRUM
INFRASTRUKTUR
www.eps-dc.com


EATON
Powering Business Worldwide

AC Input


Nominal AC Input:	100V, 120V, 208 - 240V
Rated Operating Range:	100 to 275V rms (see product performance curves).
Extended Operating Range:	90 to 300V rms
Frequency Range:	45 to 66Hz
Maximum Input Current:	18A rms
Efficiency:	96.2% peak >95% (17 to 100% load, Vin=230Vac, Vout=54.5Vdc)
Power Factor:	>0.99 (50 to 100% load)
Total Harmonic Distortion (THD):	<5% (50 to 100% load, rated 230V ac voltage)
Swell Tolerance:	Rectifier shuts down above 305V <i>Returns to normal operation when input is within operating range.</i>
Input Over-current Protection:	Fuses (phase and neutral) HRC
AC Fuse Ratings:	25A / 250V

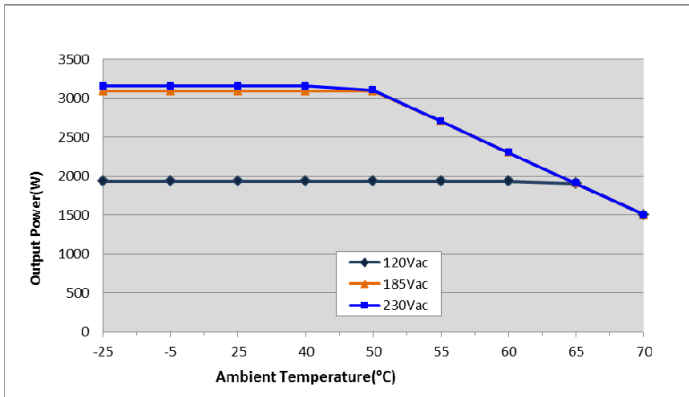


Output Power derating with Temperature and AC Input Voltage (Vout = 54.5V)

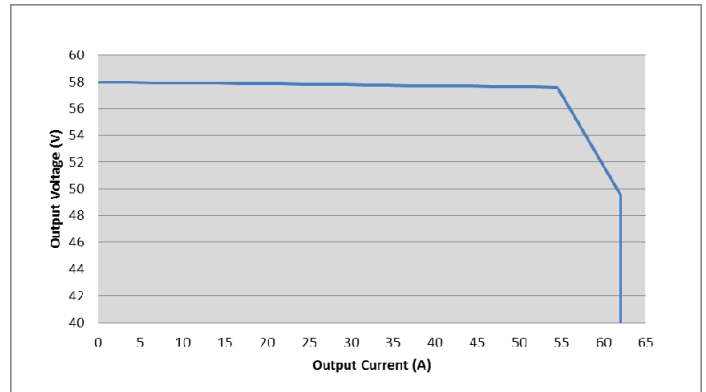

Output Voltage with Output Current (AC Input >185V, Vout = 50.0V)

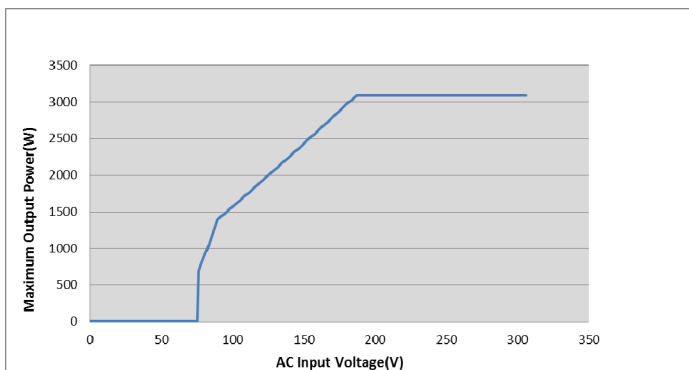

Maximum Output Power with AC Input Voltage (Ambient Temperature ≤ 50°C)

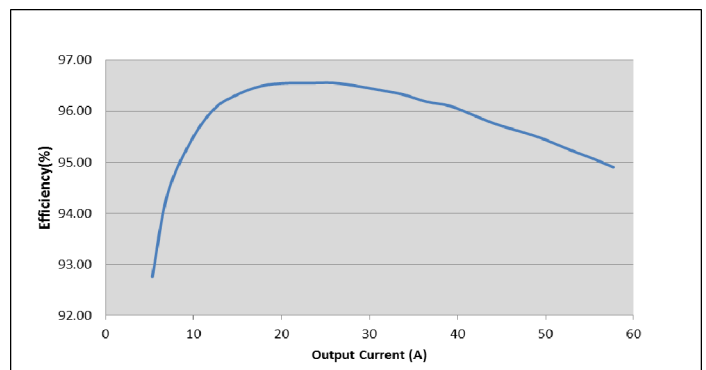

Rectifier Efficiency with Output Current (Ambient Temperature 25°C, Vin = 230V, Vout = 54.5V)

DC Output

Nominal Voltage:	48V
Adjustable Voltage Range:	43.2 to 57.5V <i>Constant power output characteristic 50 – 57.5V. Load required below 45V</i>
Rated Output Power:	3000W @ 185 – 275V ac (230V nominal) 1725W @ 110 – 120V ac (120V nominal)
Preset Accuracy	±0.1V
Regulation:	±0.1V <i>Constant voltage mode, AVC enabled from system controller.</i>
Default (Fail-safe) voltages Loss of System Communication: Preset voltage:	Output voltage resets to system preset voltage 54.5 ±0.1V (manufacturer preset)
Hold-up Time:	10ms <i>At 80% output power and 230V ac the DC output voltage change is 54.5V to 43.2V.</i>
Start-up (soft start) Start up delay: Output ramp slope: (rectifier rated output, % Amps per second)	Adjustable 0 to 600 seconds (factory preset: 2 seconds) Adjustable 1 to 100% per second (factory present 20% per second)
Protection Current Limit: Over Temperature Turndown: Over Voltage Shutdown: Short-circuit:	61.8A Automatic power turndown. See temperature derating graphs. <10ms delay Full short-circuit protection. Output current limited to less than 130% of rated output current. <i>Rectifier will continue normal operation after short-circuit is removed. Non-urgent (Current Limit) alarm generated.</i>
Noise Ripple (<100Hz) Audio Frequency (300 Hz – 3.4 kHz): Wide band (5Hz – 1MHz): Peak to peak (0 – 20 MHz): Discrete frequency (3.4kHz – 150kHz):	<20mV rms (unweighted) <2mV (psophometric) <20mV rms (unweighted) <200mV p-p (unweighted) <5mV rms (1kHz wide selective frequency) <i>Conditions: 25°C, 54.5V output</i>

Environmental Requirements

Ambient Temperature Rated Operating Range: Extended Operating Range:	-10°C to +50°C [14°F to 122°F] -40°C to +70°C [-40°F to 158°F] <i>Output characteristics derate above 50°C and below -10°C [14°F]. Refer to derating graphs.</i>
Humidity Nominal: Range:	50% RH < 95% RH (non condensing)
Altitude:	< 3000m [9800']

Mechanical

Dimensions H, W, D:	3U (130mm, 5.1"), 63mm (2.5"), 266mm (10.5") overall
Weight:	2.3kg [5.1 lb]
Connector:	PCB Edge
Cooling:	Temperature controlled, variable speed high reliability fan
Front panel LEDs: Power on: Minor alarm: Major alarm:	Green Amber Red

Compliances

Safety:	EN60950-1, IEC 60950-1
EMC – immunity Electrostatic discharge: Radiated radio frequency: Electrical fast transients: Surge: Conducted radio frequency: Dips, interruptions & variations:	EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6 EN 61000-4-11
EMC – emissions Conducted emissions (AC): Conducted emissions (DC): Radiated emissions: Harmonics: Fluctuations and flicker:	EN 55022 (Class B) EN 55022 (Class A) EN 55022 (Class B) EN 61000-3-2 EN 61000-3-3

Certifications

Europe	CE-mark
--------	---------

© Eaton Corporation. All Rights Reserved. In the interests of continual product improvement all specifications are subject to change without notice. Performance ratings are valid with all other variables at Nominal. Specifications guaranteed over rated operating range. Eaton, Powerware, Intergy, CellSure, SiteSure, DCTools and PowerManager are trade names, trademarks, and/or service marks of Eaton Corporation or its subsidiaries and affiliates. All other marks are the property of their respective owners.