

UPSAVER 3VO MODULAR HI-POWER 3-PHASE UPS





UPSAVER 3VO BROCHURE

YOUR CRITICAL POWER SOLUTION PARTNER.

The Borri Group has been developing and building uninterruptible power systems since 1932 and is a global provider of power electronics systems and solutions for harsh industrial and demanding critical power requirements.

— Borri's R&D vast expertise in all facets of firmware, power electronics and mechanical design provides innovative solutions for tomorrow's problems in Industrial and Critical Power applications.

— The company prides itself on its first-class service and superior engineering disciplines. To ensure sustained quality, Borri manages all its processes in house from feed studies to design, production and after sales service technology.

— Based in Bibbiena, Italy with over 15,000 m² production area, Borri operates across all five continents with subsidiaries in USA, Canada, Germany, UAE, India and Malaysia.

— It has also established a strong distributor network, able to deliver on site support and technical guidance indicative of our own capabilities.



Critical Power Solutions

Designing and building mission critical UPS's 1- and 3-Phase up to 21 MW.



Industrial Power Solutions

Designing, engineering and building customised AC and DC power supply systems for harsh industrial applications.



Service

Borri team of experts support you to the highest standards no matter where you are in the world.




MODULAR HI-POWER
3-PHASE UPS

UPSAVER 3VO

from **670 kW** ———— to **2.67 MW**



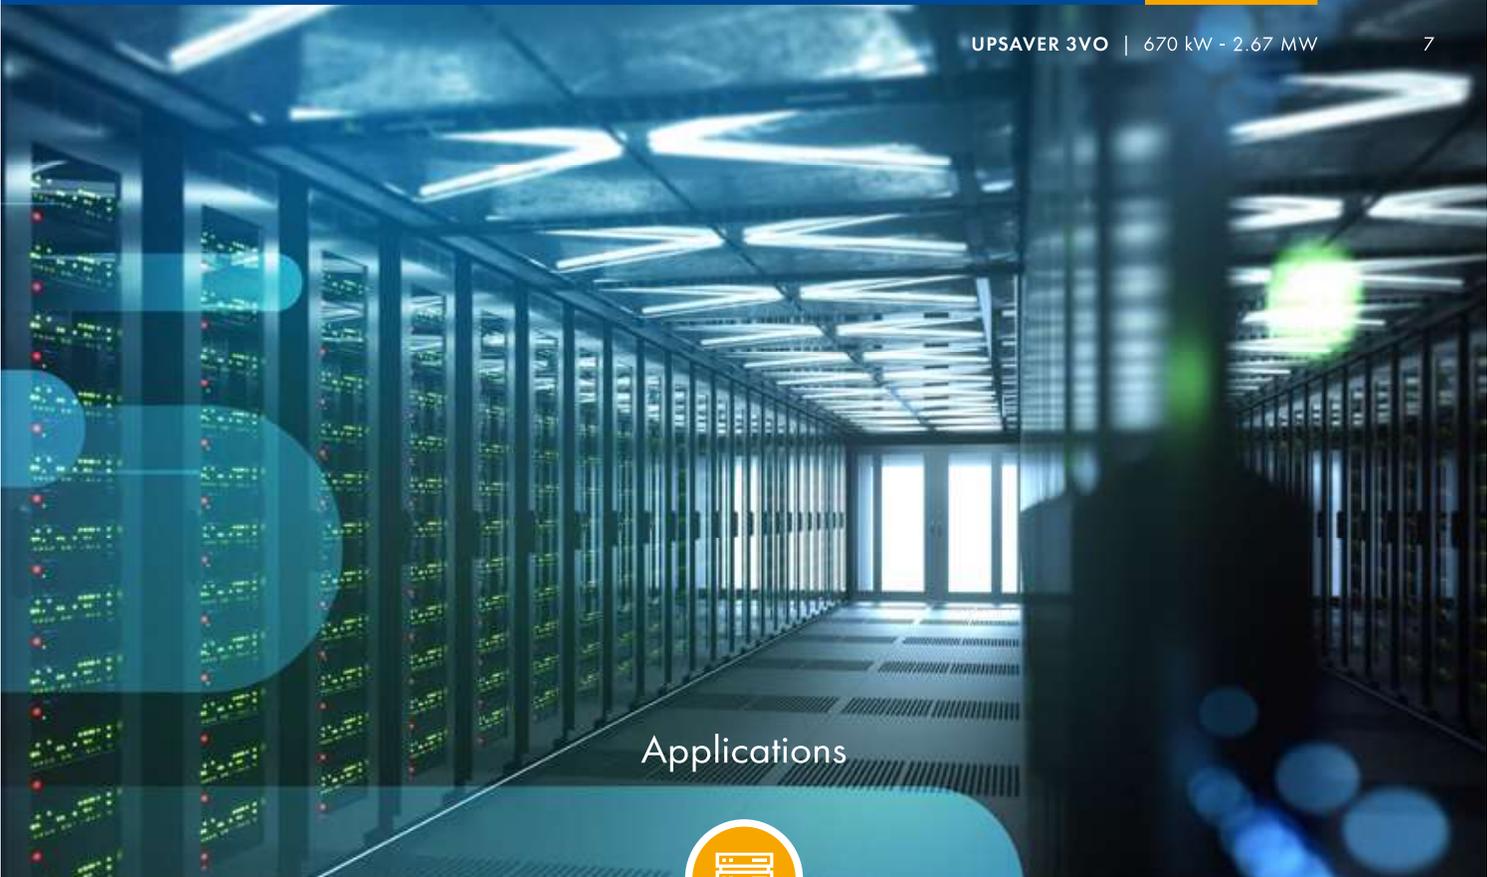

Applications



Large
data centre

High Efficiency

Online double conversion VFI with the highest efficiency thanks to the patented 3-Level Green Conversion technology.

Modular hot swappable

Hot swappable and hot serviceable (VFI) modules ensuring lowest MTTR for highest overall availability.

3D Scalability

Up to 2.67 MW in a single unit, up to 21 MW in a parallel system and synchronized dual feed systems.

Borri 3rd Generation UPSaver 3vo high power modular UPS delivers unsurpassed performance for large and hyperscale data centres providing the highest level of availability for this power range, lowest power consumption and TCO.

UPSaver 3vo: designed for versatility and flexible power upgrade.



Main features

- Up to 97.2% online VFI efficiency* (certified by third party) and high efficiency operating modes.
- UPSaver 3vo operating modes providing best efficiency in all conditions: double conversion (VFI), ECO mode (VFD) and Ultra High Efficiency (VFD).
- Maximised efficiency and low TCO thanks to load matched output power adjustment.
- Hot scalable 333 kW power units with hot swap power packs thanks to optional distribution cabinets.
- Power parallel scalable up to 21 MW.
- High Genset compatibility thanks to minimum input capacitive power, unit input power factor, THDi <3% and programmable soft start features.
- Backfeed protection circuitry for maximum operator safety.
- Very small footprint.
- System design flexibility and total installation adaptability.
- Solutions for peak shaving.
- 10" colour touch screen display.
- Green Conversion Battery Care (GCBC) for extended battery service life.
- VRLA and Li-Ion compatible.

*Conditions apply

Hot scalability & serviceability (on demand)

UPSaver 3vo can be configured with distribution sections including switches for rectifier, output and battery per each 333 kW modules. By this option, the unit can be upgraded and maintained while operating online VFI.

3-L Green Conversion Technology

Green Battery Management and Green Conversion technology save battery life, by mitigating the major root causes of battery ageing, such as ripple current and floating charge micro currents. UHE mode of operation dramatically increases the duration of wearing components.

PEP (Product Environmental Profile)

For UPSaver 3vo we draw up an EPD (Environmental Product Declaration) or PEP (Profil Environnemental Produit) in line with ISO 14025: it is a declaration that is a sort of environmental photograph of the product.

The EPD is drawn up according to the concept of Life Cycle Assessment: it examines the environmental impact of a product throughout its life cycle, from the development of product specifications to the choice of materials to be used and the end-of-life destination of the product itself.



UPSAVER 3vo technical data

| Rating (kVA) | 670 | 1000 | 1340 | 1670 | 2000 | 2340 | 2670 |
|---|--|---------------|---------------|---------------|----------------|----------------|-------|
| N of modules | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| UPS dimensions WxDxH (mm)* | 3800x970x2150 | 4450x970x2150 | 6550x970x2150 | 7200x970x2150 | 7650x1200x2150 | 8800x1200x2150 | (***) |
| UPS weight (kg)* | 2140 | 2710 | 4205 | 4775 | 5770 | 6630 | (***) |
| Battery configuration | External 360 to 372 cells, VRLA, Li-Ion (other options) | | | | | | |
| Input | | | | | | | |
| Connection type | Hardwire 4w (rectifier), 4w (bypass) | | | | | | |
| Nominal voltage | 400 Vac 3-phase with neutral (rectifier), 380/400/415 Vac 3-phase with neutral (bypass) | | | | | | |
| Voltage tolerance | -20%, +15% (rectifier); ±10% (bypass) | | | | | | |
| Frequency and range | 50/60 Hz, 45 to 65 Hz | | | | | | |
| Power factor | 0.99 | | | | | | |
| Current distortion (THDi) | <3% | | | | | | |
| Output | | | | | | | |
| Connection type | Hardwired 4w | | | | | | |
| Nominal voltage | 380/400/415 Vac 3-phase with neutral | | | | | | |
| Frequency | 50/60 Hz | | | | | | |
| Voltage regulation | Static: ±1%; Dynamic: IEC/EN 62040-3 Class 1 | | | | | | |
| Power factor | Up to 1, without power derating | | | | | | |
| Overload capacity** | Inverter: 105% continuous at 30°C, 125% for 10 min; 150% for 1 min; bypass: 110% continuous; 150% for 1 min; 700% for 100 ms; 1000% for 10 ms | | | | | | |
| Efficiency (AC/AC) | Up to 99% | | | | | | |
| Classification by IEC/EN 62040-3 | VFI-SS-11 | | | | | | |
| Connectivity and function extensions | | | | | | | |
| Front panel | 10" colour touch screen display, 1024x600 pixels | | | | | | |
| Remote communication | Included: serial RS232; input terminal block (remote emergency power off, battery circuit breaker aux.cont., external maintenance bypass circuit breaker aux. cont., diesel mode aux.cont., external output circuit breaker aux. cont., remote transfer by bypass mode); SPDT contact relay board; ModBus-RTU (RS485); Optional: ModBus-TCP/IP (Ethernet) | | | | | | |
| Optional features | Isolation transformer; battery cabinets; DC protection cabinets; battery thermal probe; parallel kit; load-sync for single UPS and load-sync box (2 UPS systems); other options on request | | | | | | |
| System | | | | | | | |
| Protection degree | IP 20 | | | | | | |
| Colour | RAL 9005 | | | | | | |
| Installation layout | Wall, back to back and side by side installation allowed | | | | | | |
| Accessibility | Front and top access, bottom and top cable entry | | | | | | |
| Parallel configuration | Up to 8 UPS, for a total of 21 MW | | | | | | |

* Full option version including top busbar entry module, main switches, hot swap distribution modules **Conditions apply ***Contact our sales team for confirmation

Other features

| | |
|---|---|
| Environmental | |
| Operating temperature range | 0°C to +40°C with no power derating |
| Storage temperature range | -10°C to +70°C |
| Altitude (AMSL) | < 1000 m without power reduction, > 1000 m with reduction of 0.5% per 100 m |
| Audible noise at 1 m (dBA) | < 65 |
| Standards and certifications | |
| Quality assurance, environment, health and safety | ISO 9001:2015, ISO 14001:2015, BS OHSAS 18001:2007 |
| Safety | IEC/EN 62040-1 |
| EMC | IEC/EN 62040-2 |
| Environment aspects | IEC/EN 62040-4; ISO 14025 |
| Test and performance | IEC/EN 62040-3 |
| Protection degree | IEC 60529 |
| Marking | CE |

SERVICE

Customer's expectation defines Borri's priority from the early analysis of the project requirements to a worldwide commissioning and service. Many thousands of systems have been successfully installed and maintained globally, with continuous support from a highly trained team of expert, certified technicians and engineers. From the professional set-up of Borri's training centre or on site, the training and service team stand ready to provide support and contribute to tailored training at Borri or on site. You can be assured of Borri support to the highest standards no matter where in the world you are.



Planning, installation, commissioning

Borri assist you in every single step of your project. Our R&D team can analyse and develop solutions to a wide range of edge system requirements.



Analytical tests

Borri undertakes a series of analytical tests in order to guarantee higher efficiency and continuity to your system operation.



Repair & spare parts

All spare parts supplied by Borri are original, tested and guaranteed to be fully compliant with Borri solutions.



Remote monitoring

Guardian Net remote monitoring system allows you to detect any deviation from optimum operation and trigger proper and immediate response, so that anomalies don't evolve into issues.



Maintenance

Preventive maintenance guarantees uninterrupted operations and optimised system efficiency.




Battery tests

Batteries have a limited time life and their proper maintenance is of high importance to guarantee efficiency to the UPS and avoid potential failures. Borri delivers high quality and performing batteries to assure smooth operations.



Training

Borri offers distributors and customers a service training structured in 3 levels. Courses can be held in Borri training centres or on-site.





www.borri.it



BORRI HEADQUARTERS AND FACTORY

Borri S.p.A

Via 8 Marzo, 2
52011 Bibbiena (AR)
Italy
Tel. +39 0575 5351
Fax +39 0575 561811
info.borri.it@legrand.com

BORRI SUBSIDIARIES AND SERVICE CENTRES

Americas

Borri Power (US) Inc.

9000 Clay Road, Suit 104
Houston, Texas, 77080
USA
Tel. +1 346 212 2686
Fax +1 346 980 8875
info.borripower@legrand.com

Asia Pacific

Borri Asia Pacific
Engineering Sdn. Bhd.

No.13, Jalan Serendah 26/41,
Sekitar 26, Seksyen 26,
40400 Shah Alam, Selangor
Malaysia
Tel. +60 3 5191 9098
Fax +60 3 5103 8728
sales@borri-asia.com

India

Borri Power India Pvt. Ltd.

Plot No. 69, Ground Floor
Nagarjuna Hills, Panjagutta
Hyderabad, 500 082
India
Tel. +91 40 2335 4095
info.borri.it@legrand.com

Middle East and Africa

Borri Power
Middle East FZCO

1-151, Techno Hub
PO Box: 342036
Dubai Silicon Oasis, Dubai UAE
Tel. +971 4 3200528
Fax +971 4 3200529
info.borri.it@legrand.com