




## Technical Datasheet

Product Code: PA135015BKS2R

Description: C13 IEC Locking 2 Tier Appliance Outlets - Right Locking Orientation - Black

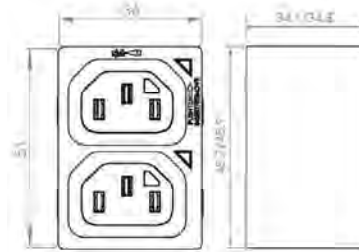

### General Information

<b>Rating</b>	10A Max / 250V~ (Europe) 15A Max / 250V~ (cUL)
<b>Materials</b>	Face & Back Cover: Polyamide 66 (PA66) - To RAL Colour 9004 (Signal Black) Gloss Finish Contacts: Tin Plated Copper Alloy (CuSn5 PB102 1/2 Hard Phosphor Bronze) Push Button: Polycarbonate - To RAL Colour 3020 (Traffic Red) Spring: Steel (Zinc Plated) Locking Blade: Spring Steel Zinc Plated Button: Polycarbonate (RAL 3020 Traffic Light Red) -20 to +70
<b>Panel Thickness</b>	1.5mm
<b>Aperture Cutout</b>	48.7-48.9mm (H) x 34.1-34.3mm (W)
<b>Receptacle Size</b>	6.3mm x 0.8mm
<b>Insulation Resistance</b>	100MΩ (500V DC, 1 Min)
<b>Dielectric Strength</b>	2KV (50Hz 1Min) to accessible surfaces
<b>Temperature Rating</b>	-20°C To + 70°C
<b>Lock Retention</b>	> 100N
<b>Features</b>	Fits any standard C14 connector Anti-Vibrate Integral plug retention feature Easy push button to release All individual terminals
<b>Standards</b>	IEC /BS EN 60320-1: 2021 IEC /BS EN 60320-3 UL 60320-1 UL 60320-3 CSA C22.2 60320-1-19 CSA C22.2 60320-3

